

Great for Large and Heavy Loads

CIP's FP Series Vertical Material Lift is a double straddle (4 post) design and is perfect for heavy or bulky loads. The four posts add extra strength and stability while effortlessly moving your large items to upper and lower levels.

Most commonly used in large warehouses and distribution centers, this lift can gently handle medium to really large items safely and effectively. This platform carriage design is one of our most versatile by allowing up to three types of loading/unloading configurations: "C", "Z", or "90°".



The all-mechanical design reduces noise and maintenance while providing a chemically clean workplace.

Standard Features

- Load Capacity: up to 30,000 lbs
- Platform Size: up to 12'W x 12'D
- Operating Levels: up to 6-Stops
- Travel Height: up to 25'
- Operating Speed: 20-25 fpm
- Power: 230V 3P
- Illuminated Controls at Each Level
- All-Mechanical, Dual Cable Lifting System
- Cable Safety Brakes
- Slack Cable Switches
- Double Swing Gates at Each Level
- Mount: Surface or Pit

Options

- Operating Speed Increased
- Power Increased To: 460V 3P
- Soft/Start-Soft Stop Operation
- Ground Level Loading Ramp
- Security Enclosures
- Multi-Level Operation
- Outside Applications
- Split Guide Rails & Knock-Down Platform Carriage

OTHER MODELS AVAILABLE!



FP Series Vertical Material Lift



shown with optional security enclosures

Toll Free: 800-699-2212

Phone: 321-728-3355 Fax: 321-728-3352

E-Mail: sales@customindprod.com

www.customindprod.com

360 East Drive, Melbourne, FL 32904, USA

SALT SPRAY, EXPLOSION PROOF, CLEAN ROOM, OR COLD ROOM? ASK US ABOUT YOUR SPECIAL APPLICATION!

► Four Post (FP)


Technical Specifications

Please fill out your specifications in the spaces provided. Afterwards, contact us for additional information and for special requirements or configurations.


1. What **WEIGHT CAPACITY** do you require?
(1,000 - 30,000 lbs.) _____
2. What is the **HEIGHT** in inches from the ground level floor surface to the second level floor surface? (up to 25') _____
3. What **PLATFORM CARRIAGE SIZE** do you require?
(up to 12'W x 12'D) _____
4. What **PLATFORM LOAD HEIGHT** do you require?
(72" h standard; 78" h maximum through doors)
5. Which **LOAD CONFIGURATION** do you require?
(C, Z, or 90°) _____
6. Will the unit be **PIT** or **SURFACE** mounted? _____
7. If you choose a surface mounted unit, do you require an optional **LOADING RAMP**? _____

Surface Mount: The loading height is 6" or 8" from the floor on the ground level and flush with the floor on upper levels.

Pit Mount: Loading height is flush with the floor on all levels (the standard 4-Post pit is 8"-12").

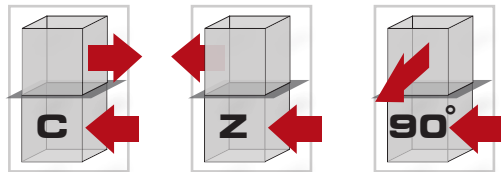


Load / Unload Configurations

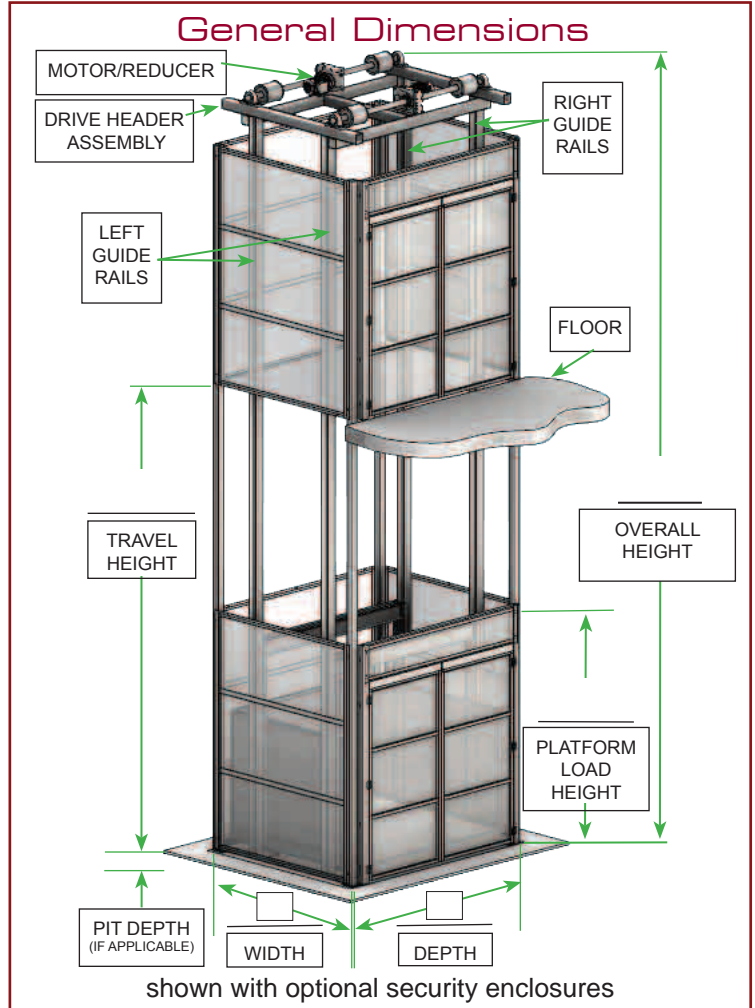

Optional Security Enclosures

Shown On A Two-Stop, Z Configuration Unit

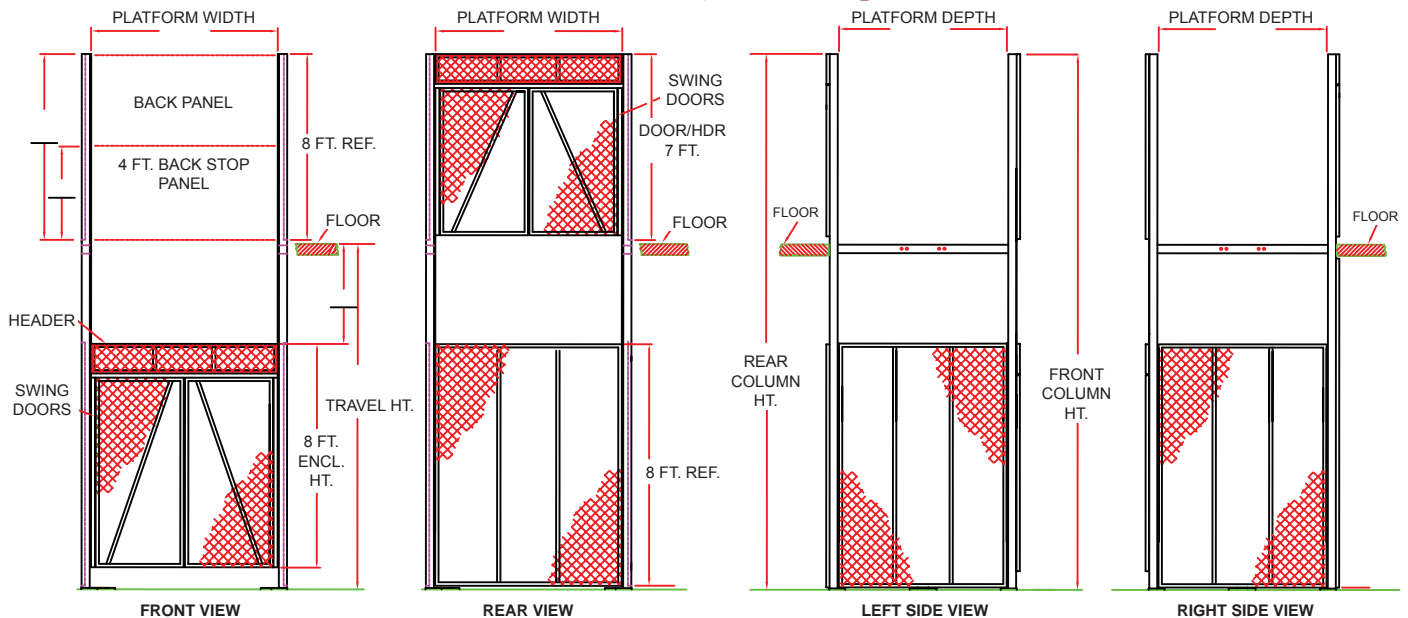

Products manufactured by Custom Industrial Products, Inc. are for material use only (no riders) and are designed to be installed in accordance with ASME B20.1, the nationally recognized standard for this type of equipment. It is the responsibility of the owner to install and operate the equipment in accordance to all applicable federal, state, and local codes and requirements. Note: Dimensions and calculations shown are for reference purposes only and may differ from your lift. Before making any building modifications, contact CIP to request a job specific drawing. Some limitations may apply.