


Our Most Versatile Lift!

Custom Industrial Products' S Series Vertical Material Lift is a straddle (2 post) design and is popular because of its variety of applications. It is perfect for any mezzanine, balcony or multi-story application where safe material handling is required.

The platform carriage of the 2-Post is available in many different sizes and it can easily handle small, medium, or large material loads. The platform carriage design allows for loading and unloading from the same side (C-Configuration) or from front to rear (Z-Configuration).



The all-mechanical design reduces noise and maintenance while providing a chemically clean workplace.

Standard Features

- Load Capacity: up to 6,000 lbs
- Platform Size: up to 8'W x 8'D
- Operating Levels: up to 4-Stops
- Travel Height: up to 40'
- Operating Speed: 20-25 fpm
- Power: 230V 3P
- Illuminated Controls at Each Level
- All-Mechanical, Dual Cable Lifting System
- Cable Safety Brakes
- Slack Cable Switches
- Double Swing Gates at Each Level
- Mount: Surface or Pit

Options

- Operating Speed Increased
- Power Increased To: 460V 3P
- Soft/Start-Soft Stop Operation
- Ground Level Loading Ramp
- Security Enclosures
- Multi-Level Operation
- Outside Applications
- Split Guide Rails & Knock-Down Platform Carriage

OTHER MODELS AVAILABLE!



S Series Vertical Material Lift



shown with optional security enclosures

Toll Free: 800-699-2212

Phone: 321-728-3355 Fax: 321-728-3352

E-Mail: sales@customindprod.com

www.customindprod.com

360 East Drive, Melbourne, FL 32904, USA

SALT SPRAY, EXPLOSION PROOF, CLEAN ROOM, OR COLD ROOM? ASK US ABOUT YOUR SPECIAL APPLICATION!

► Straddle (S)

Technical Specifications

Please fill out your specifications in the spaces provided. Afterwards, contact us for additional information and for special requirements or configurations.

1. What **WEIGHT CAPACITY** do you require?
(1,000 - 6,000 lbs.) _____
2. What is the **HEIGHT** in inches from the ground level floor surface to the second level floor surface? (up to 40') _____
3. What **PLATFORM CARRIAGE SIZE** do you require?
(up to 8'W x 8'D) _____
4. What **PLATFORM LOAD HEIGHT** do you require?
(72" h standard; 78" h maximum through doors) _____
5. Which **LOAD CONFIGURATION** do you require?
(C or Z) _____
6. Will the unit be **PIT** or **SURFACE** mounted? _____
7. If you choose a surface mounted unit, do you require an optional **LOADING RAMP**? _____


Surface Mount:

The loading height is 5" from the floor on the ground level and flush with the floor on upper levels.


Pit Mount:

Loading Height is flush with the floor on all levels (the standard 2-Post pit is 5"-8").

Load / Unload Configurations




General Dimensions

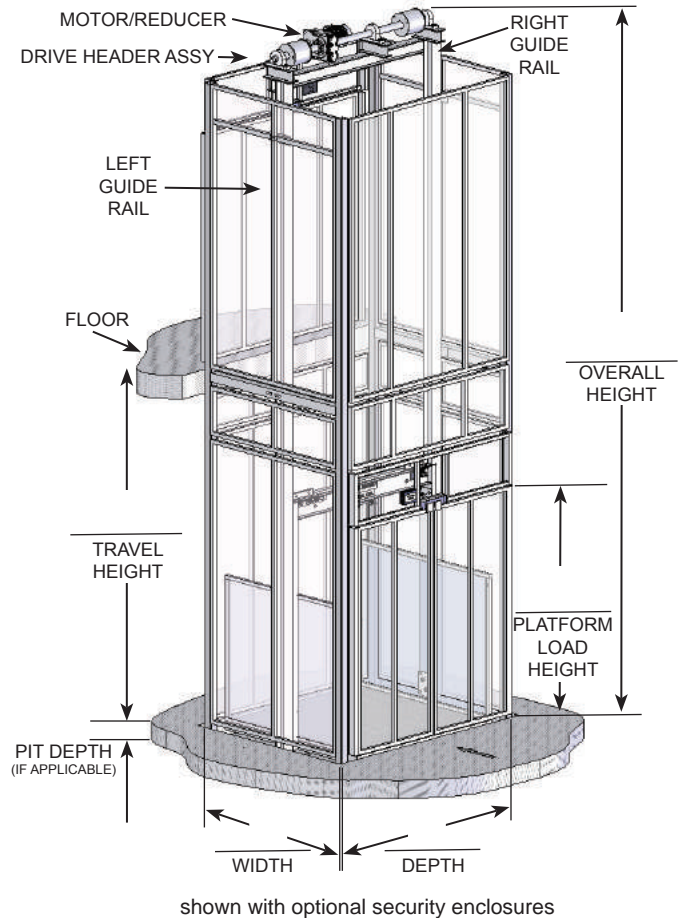

Optional Security Enclosures

Shown On A Two-Stop, Z Configuration Unit

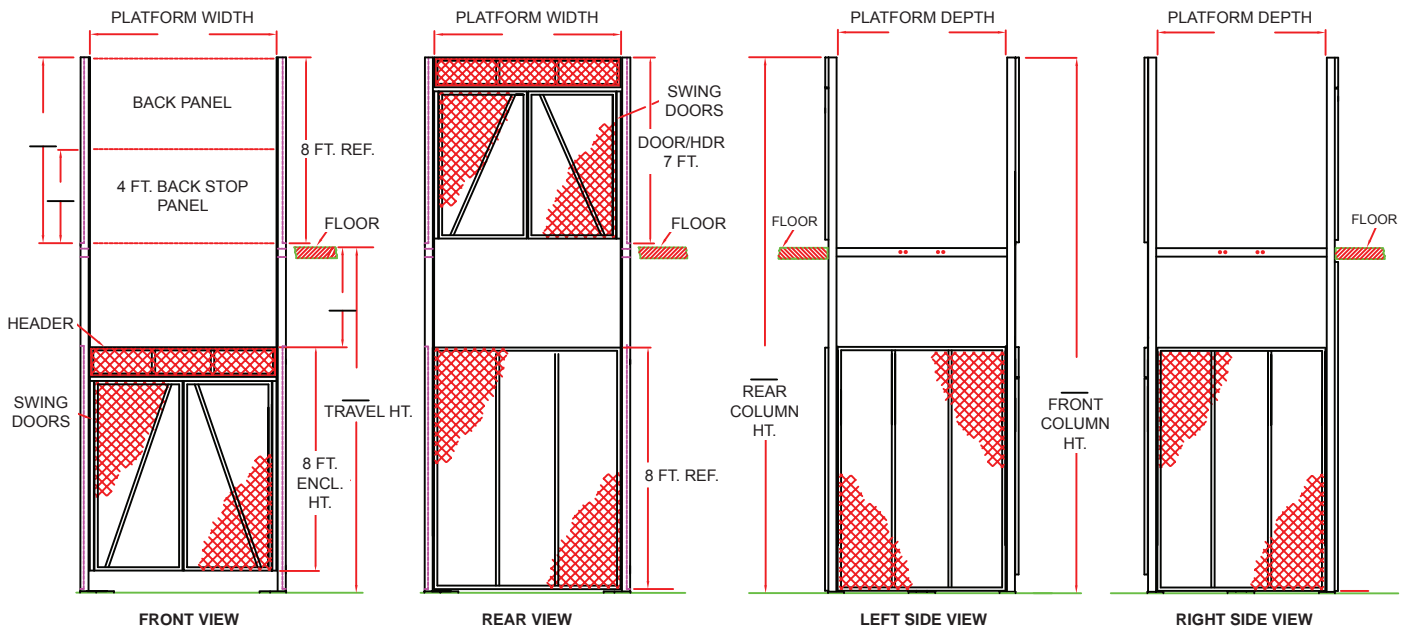

Products manufactured by Custom Industrial Products, Inc. are for material use only (no riders) and are designed to be installed in accordance with ASME B20.1, the nationally recognized standard for this type of equipment. It is the responsibility of the owner to install and operate the equipment in accordance to all applicable federal, state, and local codes and requirements. Note: Dimensions and calculations shown are for reference purposes only and may differ from your lift. Before making any building modifications, contact CIP to request a job specific drawing. Some limitations may apply.